

1. THE PROCEDURE LISTED BELOW PROVIDES THE STEPS FOR CARTRIDGE REPLACEMENT:

- A. Twist the cover counterclockwise and lift away from the base.
- B. Lift filter cartridge away from base.

NOTE: There is no need to disconnect the tubing connections.

- C. Turn filter cartridge to the left, about 1/4 turn, until rotation stops, and pull away from filter head. Discard filter cartridge.
- D. Align replacement filter cartridge lug with label on filter head and push upwards into head.
- E. Turn cartridge to the right, about 1/4 turn, until rotation stops, and install cartridge into base.
- F. Press reset button to reset flow indicator.
- G. Install cover.
- H. Turn on cold water and turn the diverter lever up to flush system for 7 minutes.

This drinking water system must be maintained according to manufacturer's instructions, including replacement of filter cartridges.

EV925268, H-54, Replacement Cartridge, Suggested list price: \$100.99

CLAIMS, PERFORMANCE & NOTES*

This system has been tested according to NSF/ANSI 42 and 53 for the reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42 and 53.

*Tested using flow rate = 0.5 and 1.67 gpm; pressure = 60 ± 3 psig;
pH = 7.5 ± 0.5; temp. = 20° ± 3°C


Substance	Influent Challenge Concentration	Max. Permissible Product Water Concentration	Reduction Requirements	Minimum Reduction	Average Reduction
Standard 42—Aesthetic Effects					
Chlorine	2.0 mg/L ±10%		≥ 50%		87.8%
Particulate, Class I particles 0.5 to <1 µm	at least 10,000 particles/mL		≥ 85%		97.9%
Standard 53—Health Effects					
Cyst	Minimum 50,000/L		99.95%	99.99%	99.99%
Lead 8.5	0.15 mg/L ±10%	0.010 mg/L		95.3%	98.6%
Lead 6.5	0.15 mg/L ±10%	0.010 mg/L		99.3%	99.3%

For installations in Massachusetts, the Commonwealth of Massachusetts Plumbing Code 248 CMR shall be adhered to. Consult your licensed plumber for installation of the system.

CALIFORNIA PROPOSITION 65 WARNING

⚠ WARNING: This product contains chemicals known to the State of California to cause cancer or birth defects or other reproductive harm.

Reduces particles as small as 0.5 micron in size by mechanical means.

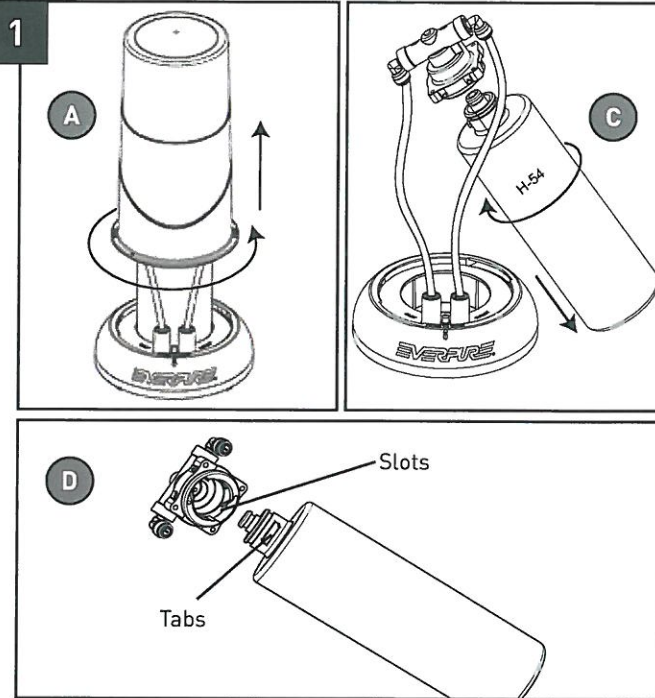

System Tested and Certified by NSF International against NSF/ANSI Standard 42 and 53 for the reduction of:

Std. No. 42—Aesthetic effects

Chemical Reduction
Taste & Odor
Chlorine

Mechanical Filtration

Nominal Particulate Class I:
97.9% reduction of particles one-half micron and larger in size.

Std. No. 53—Health effects

Mechanical Filtration
Cyst
Lead

EPA Est. No. 002623-IL-002

State of California
Department of Public Health
Water Treatment Device
Certificate Number
12-2105

Date Issued: September 6, 2012

Trademark/Model Designation	Replacement Elements
Everpure CTS-H54	H-54
Manufacturer: Pentair Residential Filtration, LLC	

The water treatment device(s) listed on this certificate have met the testing requirements pursuant to Section 116830 of the Health and Safety Code for the following health related contaminants:

Microbiological Contaminants and Turbidity

Cysts

Organic Contaminants

None

Inorganic/Radiological Contaminants

Lead

Rated Service Capacity: 750 gal

Rated Service Flow: 0.5 gpm

Conditions of Certification:

Do not use where water is microbiologically unsafe or with water of unknown quality, except that systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.